

E-Series Padlock

Extra High Security

Low Upper Body



Application

Extra High Security padlock, for general use.

Operation

The shackle is locked by a double ball bearing mechanism. Rotate key 90° to unlock.

Option

Available with retained shackle.

Materials

Body: case hardened steel
Shackle: hardened boron alloy steel

Finish

Black electrophoretic

Additional features

- Rotating disk.
- Protective shutter prevents dust contamination.
- Drainage holes prevent freezing.
- Sealing around shackle may be ordered separately.

Cylinder mechanism

Mul-T-Lock's unique high precision pin tumbler system. Pick and drill resistant for High Security needs.

Keys


Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

Cylinder options

- Interactive®, MT5® platforms
- Keyed different, keyed alike
- Master keyed

Standards

CEN, ASTM

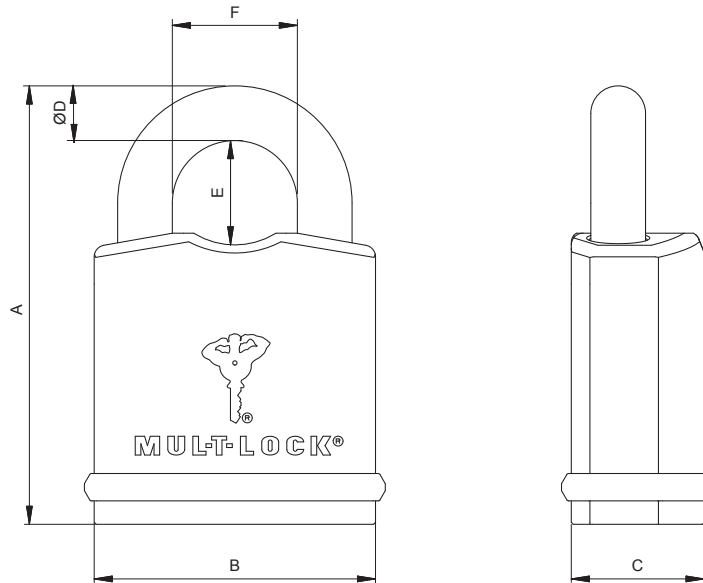

Model	Body						Shackle					Standard grades	
	A			B	C	D	E			F	CEN	ASTM	
	A1	A2	A3				E1	E2	E3				
E8-L	mm	87	115	165	52	33	8	22	50	100	26	4	3
	Inch	3.4	4.5	6.5	2.1	1.2	0.3	0.9	1.9	3.9	1.1		
E11-L	mm	97	130	167	62	34	11	26	59	96	29	4	4
	Inch	3.8	5.1	6.6	2.4	1.3	0.4	1.1	2.3	3.8	1.2		
E14-L	mm	105	136	180	72	34	14	26	57	101	32	6	5
	Inch	4.1	5.4	7.1	2.8	1.3	0.5	1.1	2.2	4	1.3		