

# E-Series Padlock

## Extra High Security

### High Upper Body - Protected



#### Application

Extra High Security padlock for general use.

#### Operation

The shackle is locked by a double ball bearing mechanism. Rotate key 90° to unlock.

#### Options

- High (protected) upper body
- Available with retained shackle

#### Materials

Body: case hardened steel

Shackle: hardened boron alloy steel

Finish: black electrophoretic

#### Additional features

- Rotating disk.
- Protective shutter prevents dust contamination.
- Drainage holes prevent freezing.
- Sealing around the shackle, can be ordered separately.

#### Cylinder mechanism

Mul-T-Lock's unique high precision pin tumbler system. Pick and drill resistant for High Security needs.

#### Keys


Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

#### Cylinder options

- Interactive®, MT5® platforms
- Keyed different, keyed alike
- Master keyed

#### Standards

CEN, ASTM

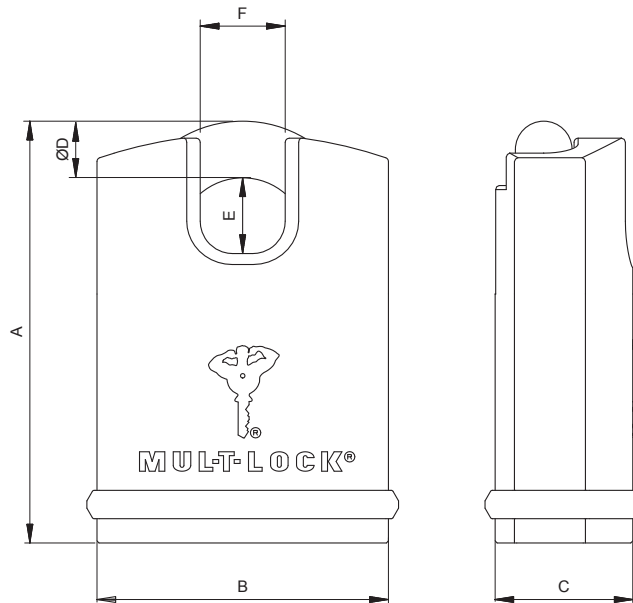

Model	Body			Shackle			Standard grades		
		A	B	C	D	E	F	CEN	ASTM
E8-H	mm	87	52	33	8	16	16	4	6
	Inch	3.4	2	1.2	0.3	0.6	0.6		
E11-H	mm	97	62	34	11	18	17	5	6
	Inch	3.8	2.4	1.3	0.4	0.7	0.7		
E14-H	mm	105	72	34	14	19	21	6	6
	Inch	4.1	2.8	1.3	0.5	0.7	0.8		
E18-H	mm	120	83	39	18	27	25	6+	6
	Inch	4.7	3.3	1.5	0.7	1.1	0.9		

